

TagMatiks Flexi 3.4" x 1" RFID Tag



Ordering Information

SKU: TAG-FLEX-UT

Frequency: 860-960 MHz (EU, US, JP)

01 What are the TagMatiks Flexi Tags?


The TagMatiks Flexi tags are a great general purpose RFID tag that can be bent and attached to items in a wide variety of methods.

02 What are the Flexi tags made from?

The TagMatiks Flexi tags are made from a TPE (thermoplastic elastomer) housing. This material makes them great for use cases when the RFID tag needs to be waterproof or be able to withstand the elements.

03 What applications can the TagMatiks Flexi Tags be used for?

Some examples include asset tracking and logistics, laundry, medical & health, returnable transport items, waste management.

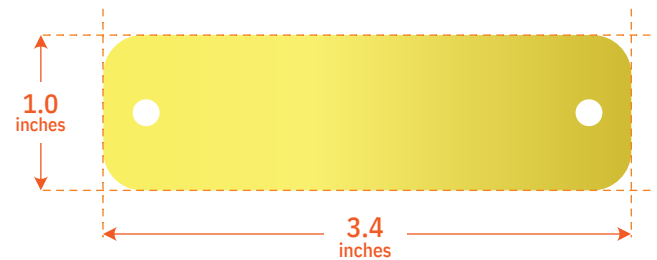

Sample methods to attach the Flexi Tags:

- Cable Ties
- Industrial Adhesive
- Rivets
- Screws



NEED HELP WITH YOUR SOLUTION OR
MORE DETAILS? CONTACT US!

TagMatiks Flexi 3.4" x 1" RFID Tag


SKU: TAG-FLEX-UT

Frequency: 860-960 MHz (EU, US, JP)

Contact

-  (408) 739-3500
-  sales@rfd4ustore.com
-  rfd4ustore.com

Location

-  5159 Commercial Circle,
Suite H, Concord,
CA, 94520

Radio Frequency Specification

- Air Protocols - ISO 18000-6C
- Operating Frequency - 860-960 MHz (EU, US, JP)
- IC Type - Higgs 3
- User Memory - 512 bit
- EPC Memory - 96 bit
- Read Range - Usually 3 - 4 M / 9ft - 12ft

Physical Specification

- Attachment Method - Adhesive
- Operating Temperatures - -40°C to +70°C (-40°F to +158°F)
- Dimensions - 3.4 x 1.0 x 0.1 inches (87 x 25 x 3 mm)