

Global Trak



Functional Specifications

RF air protocol	EPC Class 1 Gen 2; ISO18000-6C
Operating frequency	UHF 860-960 MHz (Global)
IC type	Impinj Monza 4QT ¹
Memory configuration	128-EPC bits; 512-bit user memory
Functionality	Read / write (user programmed)
Memory – expected read / write cycles	100,000 cycles at 77°F (25°C)
Data retention	50 years ²
Warranty (limited)	1 year

Performance Characteristics

Read range on-metal, 4W EIRP (2W ERP) ³	Up to 8 ft (2.5 m)
Read range off-metal, 4W EIRP (2W ERP) ³	Up to 6 ft (1.8 m)
Read range hanging, 4W EIRP (2W ERP) ³	Up to 6 ft (1.8 m)
Polarization	Linear

Physical Specifications

Material	Industry Grade Polymer
Mounting system	Adhesive; built-in ø 0.1 in (2.6 mm) tethering hole
Color	Dark gray, optional colors available
Optional label	Standard or custom data in 1D or 2D matrix and human readable EPC code

Environmental and Industry Compliance

FSTC	FSTC compliant
RoHS	EU Directive 2011/65/EU


¹ This product utilizes an Impinj 4QT chip. All tags carry the same EPC number. However, the TID number is unique to each individual tag. Xerify will verify the Read/Write function of each chip memory before shipment.

² The chip data retention is based on chip operating under general environment conditions.


³ Actual read range may vary based upon use case and antenna power.

Radiation Pattern

On metal

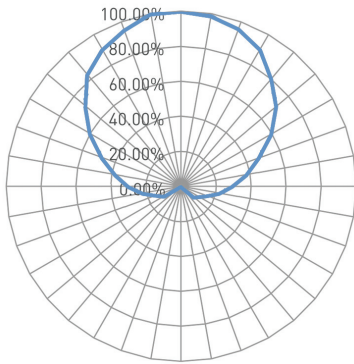

Off metal

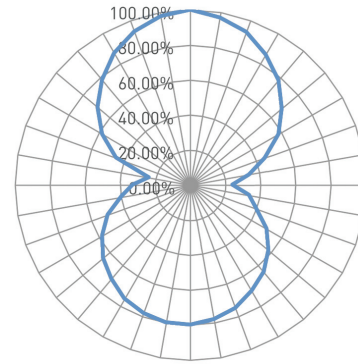

Operational and Environmental Specifications

Operational temperature

Cold	-40°F (-40°C)
Dry heat	+185°F (+85°C)
Thermal shock	-40°F to 185°F (-40°C to +85°C); cycled

Application temperature

Cold	-40°F (-40°C)
Dry heat	+185°F (+85°C)

Humidity

Operational humidity	5%-95% non-condensing
Storage humidity	5%-95% non-condensing

Shock (drop)

3 ft (1 m) to concrete/granite up to 200 cycles


Compression strength

14.5 psi (100 kPa)

IP classification

IP54

Product Dimensions and Weight

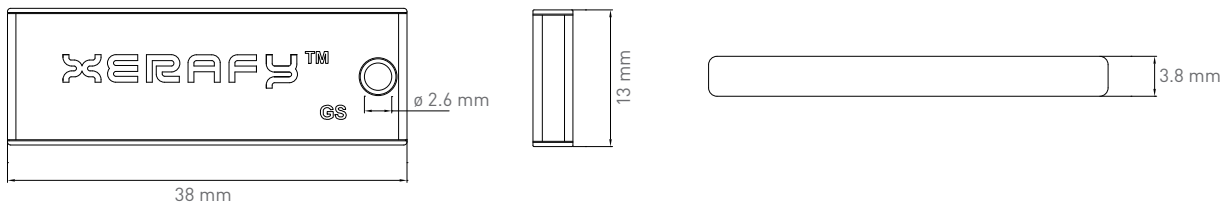

Dimensions (mm)

38 x 13 x 4

tolerance

+/- 0.35

Dimensions (in)

1.50 x 0.51 x 0.16

tolerance

+/- 0.014

Tethering hole diameter

0.1 in +/-0.008 (2.6 mm +/-0.2)

Weight

0.09 oz (2.6 g)

Order information

X0330-GL011-M4QT

Global Trak