



MT – 242063/CLH  
865-870MHz & 902-928MHz 9.0 dBic SLIM READER ANTENNA



## ELECTRICAL




REGULATORY COMPLIANCE	RoHS, CE 0682
FREQUENCY RANGE	865-870 & 902-928 MHz
GAIN	9.0 ± 1.0 dBic
VSWR	1.5 :1 (typ) , 2 : 1(max)
POLARIZATION	LHCP
3DB ELEVATION BEAMWIDTH	65° (typ)
3DB AZIMUTH BEAMWIDTH	25° (typ)
F/B RATIO	20dB (typ)
POWER	6W (max)
INPUT IMPEDANCE	50 (ohm)
AXIAL RATIO	2 dB (typ) , 4 dB (max)
LIGHTNING PROTECTION	DC Grounded
MECHANICAL	
DIMENSIONS (LXWXD)	773 x 310mm x 15mm (max)
CONNECTOR	SMA Female with cable (length 300 mm)
WEIGHT	2 Kg (max)
RADOME MATERIAL	Plastic
MTBF	80000 hours
BASE PLATE MATERIAL	Metallic
OUTLINE DRAWING	RD43351700C

## ADD TO COMPARISON | COMPARE

TEST	STANDARD	DURATION	TEMPERTURE	NOTES
LOW TEMPERATURE	IEC 68-2-1	72 h	-40°C	
HIGH TEMPERATURE	IEC 68-2-1	72 h	+71°C	
TEMP. CYCLING	IEC 68-2-14	1 h	-45°C +70°C	3 Cycles
HUMIDITY	ETSI EN300-2-4 T4.1E	144 h		95%
WATER TIGHTNESS	IEC 529			IP54
FLAMMABILITY	UL 94			Class HB
VIBRATION	IEC 60721-3-4	30 min/axis		Random 4M3
MECHANICAL SHOCK	IEC 60721-3-4			4M3
OPERATION TEMPERATURE	-10 °C to 50°C			
STORAGE TEMPERATURE	-30°C to +70°C			

AZIMUTH RADIATION PATTERN MIDBAND  
FREQ. 0.915 GHZ

ELEVATION RADIATION PATTERN MIDBAND  
FREQ. 0.915 GHZ

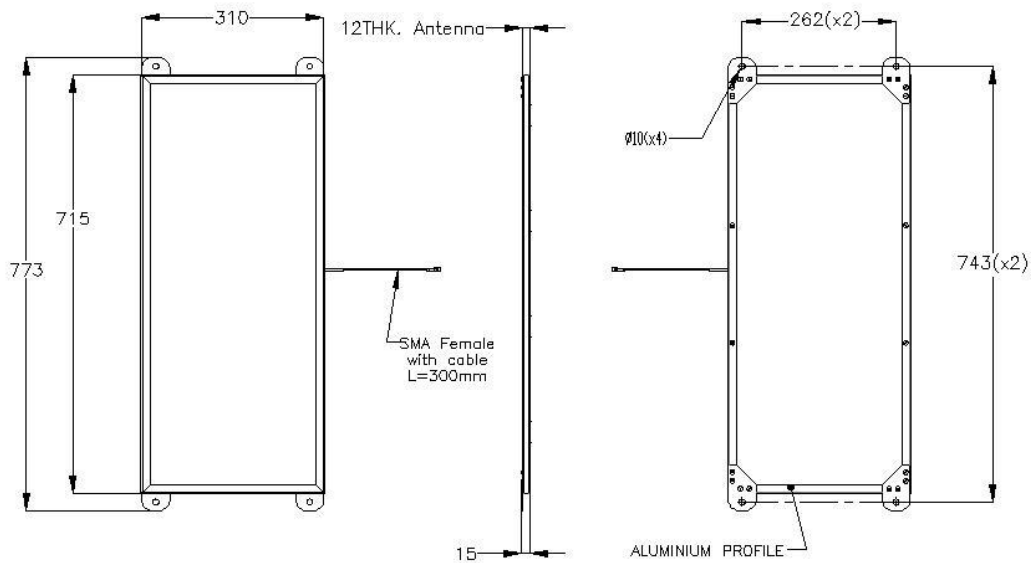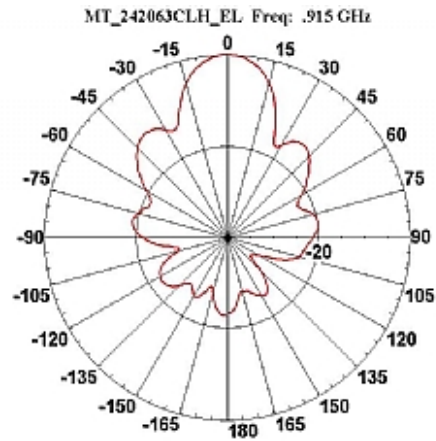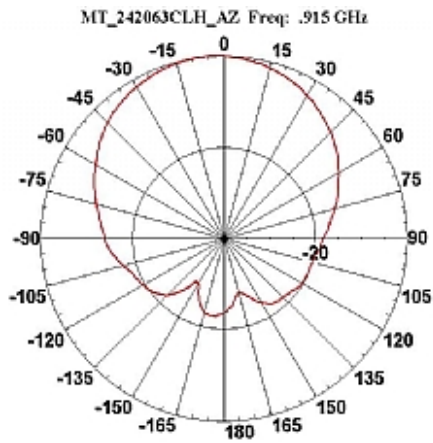

**WAIVER!**

While the information contained in this document has been carefully compiled to the best of our present knowledge, it is not intended as presentation or warranty of any kind on our part regarding the fitness of the products concerned for any particular use or purpose and neither shall any statement contained herein be construed as a recommendation to infringe any industrial property rights or as a license to use any such rights. The fitness of each product for any particular purpose must be checked beforehand with our specialists.

**MTI Wireless Edge Ltd.**  
 11 Hamelacha St. Afek Industrial Park Rosh Ha'ayin 48091, Israel  
 Tel: +972-3-9008900 | Fax: +972-3-9008901 | [www.mtiwe.com](http://www.mtiwe.com)

**RFID4u**  
 Store  
 Authorized Reseller:  
 RFID4UStore  
[www.rfid4ustore.com](http://www.rfid4ustore.com)  
 1-408-739-3500  
[sales@rfid4ustore.com](mailto:sales@rfid4ustore.com)