



MT-262041/TRH/A/K 865 - 928 MHz, 5.5dBic RHCP READER ANTENNA

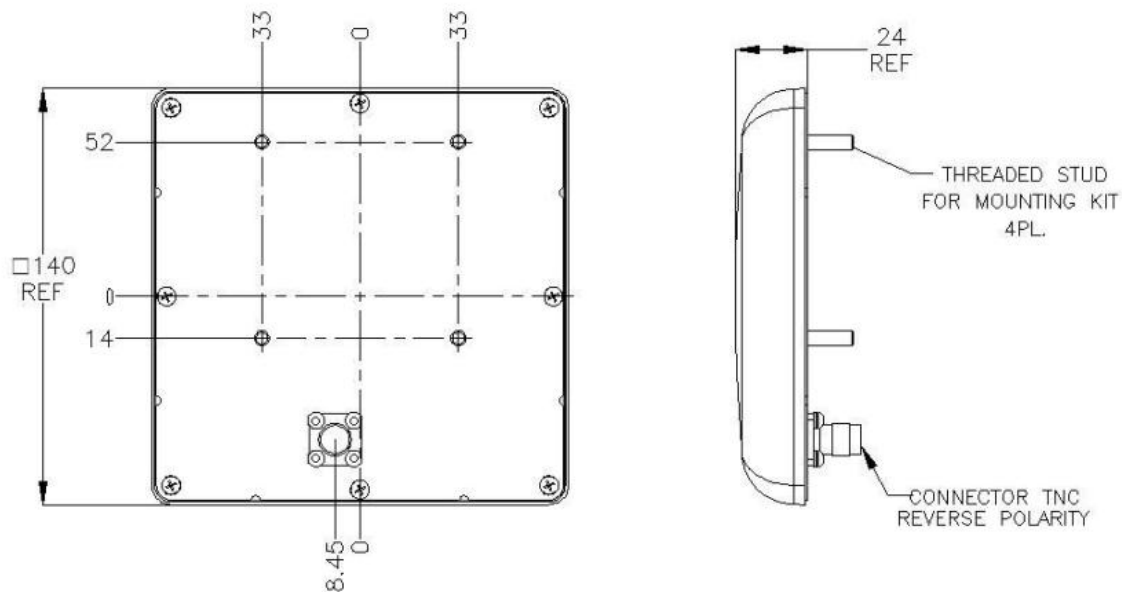


ELECTRICAL

REGULATORY COMPLIANCE	RoHS, CE 0682
FREQUENCY RANGE	865 - 928 MHz
GAIN	4.5 ± 0.5 dBic @ 865-870 MHz 5.5 ± 0.5 dBic @ 902-928 MHz
VSWR	1.3:1 (typ) 1.5 : 1(max)
POLARIZATION	RHCP
3DB ELEVATION BEAMWIDTH	85° (typ)
3DB AZIMUTH BEAMWIDTH	85° (typ)
F/B RATIO	-15 dB (typ)
POWER	6W (max)
INPUT IMPEDANCE	50 (ohm)
AXIAL RATIO AT BORESIGHT	2.5 dB (typ) , 4.0 dB (max) @ 865-870 MHz 1.5 dB (typ) , 2.5 dB (max) @ 902-928 MHz
LIGHTNING PROTECTION	DC Grounded
MECHANICAL	
DIMENSIONS (LXWXD)	140 x 140 x20 mm (max)
CONNECTOR	Reverse Polarity TNC
WEIGHT	0.5 kg (max)
MOUNTING KIT	120018/A
RADOME MATERIAL	Plastic
BASE PLATE MATERIAL	Aluminum with chemical conversion coating
OUTLINE DRAWING	RD43467700C

ENVARIOMENTAL

TEST	STANDARD	DURATION	TEMPERTURE	NOTES
LOW TEMPERATURE	IEC 68-2-1	72 h	-55°C	
HIGH TEMPERATURE	IEC 68-2-2	72 h	+71°C	
TEMP. CYCLING	IEC 68-2-14	1 h	-45°C +70°C	3 Cycles
VIBRATION	IEC 60721-3-4	30 min/axis		Random4M5
SHOCK MECHANICAL	IEC 60721-3-4			4M5
HUMIDITY	ETSI EN300-2-4 T4.1E	144 h		95%
WATER TIGHTNESS	IEC 529			IP67
SOLAR RADIATION	ASTM G53	1000h		
FLAMMABILITY	UL 94			Class HB
SALT SPRAY	IEC 68-2-11 Ka	500h		
ICE AND SNOW				25mm Radial

WIND SPEED SURVIVAL OPERATION220 Km/h
160 Km/h**WIND LOAD (SURVIVAL)
FRONT THRUST
SIDE THRUST**5.6 kg
0.8 kg**WAIVER!**

While the information contained in this document has been carefully compiled to the best of our present knowledge, it is not intended as presentation or warranty of any kind on our part regarding the fitness of the products concerned for any particular use or purpose and neither shall any statement contained herein be construed as a recommendation to infringe any industrial property rights or as a license to use any such rights. The fitness of each product for any particular purpose must be checked beforehand with our specialists.

MTI Wireless Edge Ltd.

11 Hamelacha St. Afek Industrial Park Rosh Ha'ayin 48091, Israel
Tel: +972-3-9008900 | Fax: +972-3-9008901 | www.mtiwe.com



Authorized Reseller:
RFID4UStore
www.rfid4ustore.com
1-408-739-3500
sales@rfid4ustore.com