




R3101CU

Lepton³x1-USB

25dBm 1-Port USB
RAIN RFID Reader Module

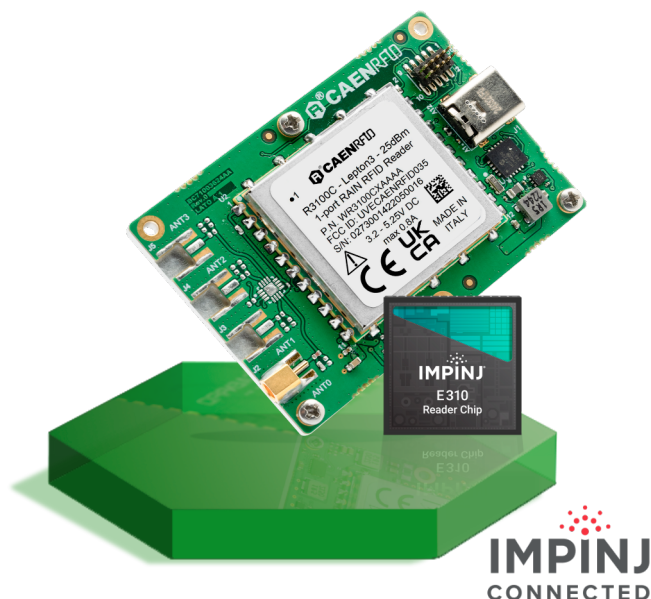

IMPINJ
E310
Reader Chip
CONNECTED

BENEFITS

Ultra compact
size

High Sensitivity

USB Type-C
connector

IOIOI
Serial interface

MMCX antenna
connector

Wide voltage
range

Features

- RAIN RFID (UHF EPC Class1 Gen2, ISO 18000-63) compliant
- Multiregional support
- Ultra compact size
- Up to 25 dBm (316 mW) output power
- USB Type-C interface (Virtual COM)
- Low power consumption

Applications

- Handheld devices
- Multiregional label printers and applicators
- Points of sale readers
- Voice operated gloves
- Smart appliances for home automation
- Security and access management systems

Overview

The **Lepton³x1-USB** (Model R3101CU), an embedded reader of the easy2read[®] product line, is an ultra compact reader for low power, high performance RAIN RFID applications.

With programmable output power from 10 dBm to 25 dBm, the reader can detect tags at more than 2 m of distance (depending on antenna and tag dimensions).


Due to its low power consumption, the module is specifically designed to be easily integrated in battery powered devices.

The radio frequency core of the module is based on the **Impinj E310** IC that permits to achieve fast reading speed and to be used in dense reader and dense tag environments for top-class rated performances.

The compactness of the device allows to embed the **Lepton³x1-USB** inside industrial handhelds, smartphone accessories and other compact form factor devices.

The **Lepton³x1-USB** complies with and can operate in both European and US regulatory environments and, thanks to its multiregional capabilities, it's ideal for integration in devices requiring compliance to different geographical regions.

The **Lepton³x1-USB** is designed on the basis of the **Lepton³** with the aim to facilitate the integration for those who prefer to use connectors instead of automatic manufacturing required by the SMD form factor.



Technical Specification Table

Frequency Range	<ul style="list-style-type: none"> • 865.600÷867.600 MHz (ETSI EN 302 208 v. 3.3.1) • 902÷928 MHz (FCC part 15.247)
RF Power	Configurable from 10 dBm to 25 dBm (from 10 mW to 316 mW) conducted power
RX Sensitivity	<ul style="list-style-type: none"> • -72 dBm - 10%PER, assuming 20 dB antenna RL @ 25 dBm output
Antenna VSWR Requir.	< 2:1 for optimal performance
Antenna Connectors	MMCX jack
Frequency Tolerance	± 10 ppm over the entire temperature range
Number of Channels	<ul style="list-style-type: none"> • 4 channels (compliant to ETSI EN 302 208 v. 3.3.1) • 50 hopping channels (compliant to FCC part 15.247)
Standard Compliance	EPC Class 1 Gen 2 - ISO18000-63
Connectivity	<ul style="list-style-type: none"> • USB Type-C Virtual COM Port • Communication parameters: <ul style="list-style-type: none"> • Baudrate from 9.6 to 921.6 kbps, default 921.6 kbps • Databits: 8 • Stopbit: 1 • Parity: none • Flow control: none • 3.3 V I/O voltage level
I/O Interface	<ul style="list-style-type: none"> • 4 I/O lines 3.3 V level • Iout = 8 mA max.
Power Supply	<ul style="list-style-type: none"> • 4.75 ÷ 5.25 V DC (Model R3101CU)
Power Consumption	<ul style="list-style-type: none"> • 800 mA @ 5 V - RF out = 25 dBm • 5 mA in idle mode - Ready to receive commands
Dimensions	<ul style="list-style-type: none"> • (L)61 x (W)42 x (H)9.1 mm³ / 2.40 x 1.65 x 0.36 inches³
Operating Temperature	-20 °C to +70 °C
Weight	30 g



Authorized Reseller: RFID4UStore
www.rfid4ustore.com
1-408-739-3500

Ordering Options

WR3101CUXAAA	Lepton3x1-USB - 25dBm Reader Mod.		



Copyright © CAEN RFID srl. All right reserved. Information in this publication supersedes all earlier versions. Specifications subject to change without notice.



CAEN RFID srl
via Vetraia, 11 - 55049 Viareggio (LU) - Italy
Phone +39 0584 388398 - Fax +39 0584 388959
www.caenrfid.com - info@caenrfid.com