



TagMatiks Flexi 3.4" x 1" RFID Tag



Available On
RFID4u
Store

Ordering Information

SKU: TAG-FLEX-UT3

Frequency: 860-960 MHz (EU, US, JP)

01 What are the TagMatiks Flexi Tags?


The TagMatiks Flexi tags are a great general purpose RFID tag that can be bent and attached to items in a wide variety of methods.

02 What are the Flexi tags made from?

The TagMatiks Flexi tags are made from a TPE (thermoplastic elastomer) housing. This material makes them great for use cases when the RFID tag needs to be waterproof or be able to withstand the elements.

03 What applications can the TagMatiks Flexi Tags be used for?

Some examples include asset tracking and logistics, laundry, medical & health, returnable transport items, waste management.

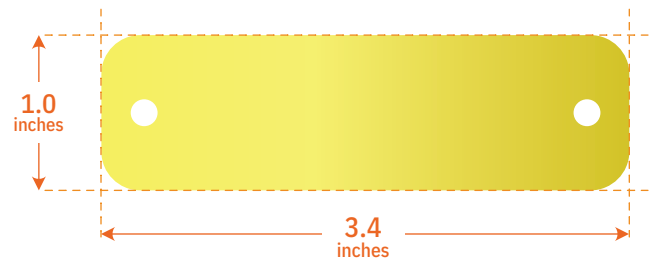

Sample methods to attach the Flexi Tags:


- Cable Ties
- Industrial Adhesive
- Rivets
- Screws

Radio Frequency Specification

Air Protocols	-	ISO 18000-6C
Operating Frequency	-	860-960 MHz (EU, US, JP)
IC Type	-	Monza M730
EPC Memory	-	128 bits
User Memory	-	N/A
Read Range	-	Up to 19.7 ft (6 meters)

Physical Specification

Attachment Method	-	Cable tie flush with surface, glue, rivet, screw
Operating Temperatures	-	-40°C to +70°C (-40°F to +158°F)
Dimensions	-	3.4 x 1.0 x 0.1 inches (87 x 25 x 3 mm)

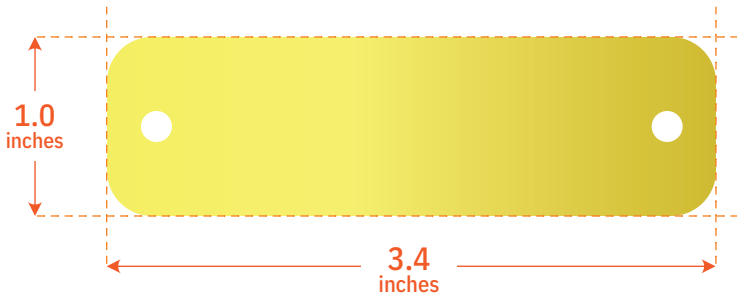

The technical data cited in this publication is not a guarantee of performance in which we assume legal, financial or contractual accountability. It is a representation of typical performance, and if required should be relied on for specific applications only after due verification by the user.



© 2024 RFID4U All Rights Reserved.

NEED HELP WITH YOUR SOLUTION OR MORE DETAILS? CONTACT US!

Location
📍 5159 Commercial Circle,
Suite H, Concord,
CA, 94520, USA

Contact
☎ (877) 599-5584
✉ sales@rfid4ustore.com
🌐 rfid4ustore.com