

ABOUT TIMES-7

Pushing the boundaries of RFID technology worldwide Times-7 are leaders in RFID antenna design and manufacture. Our patented award winning UHF antennas meet the needs of virtually any industry application; providing customers with fast accurate tracking of products, assets & people; empowering organizations to transform processes & reduce costs.

Our SlimLine range of antennas is unique in the RFID industry; offering high levels of performance & durability in an aesthetically superior form. Proven in a diverse & growing range of markets, applications include: retail & customer interaction, conference & people tracking, race timing, baggage handling, and logistic & supply chain asset management.

RFID4u Store
 Authorized Reseller:
 RFID4UStore
www.rfid4ustore.com
 1-408-739-3500
sales@rfid4ustore.com


Times-7 Research Ltd
 29 Railway Avenue
 Lower Hutt 5010
 New Zealand

NEW ZEALAND
 P: +64 4 974 6566

USA/CANADA
 P: +1 408 769 5025

E: info@times-7.com

www.times-7.com

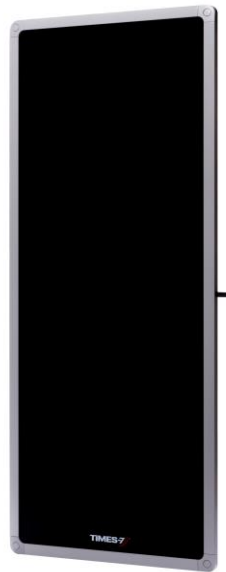

The SlimLine A6034

Up to 9m / 29 ft. read range

Just 12mm / 0.5 in. thick

High performance & rugged design

Suitable for indoor/outdoor use
& industrial applications

Part of the SlimLine range of multi-purpose antennas, the A6034 is an ultra-low profile high performance circularly polarized flat panel antenna. With a read range of up to 9 m / 29 ft. and a physical span of 747 mm (29.4 in.), this long length antenna is particularly suitable for portal applications where maximum read zone coverage is important.

Specifications


Physical / Environmental Specifications

Dimensions (L x W x D):	747 mm x 314 mm x 12 mm 29.4 " x 12.4 " x 0.5 "
Weight:	2.2kg / 4.8 lbs.
Radome Material:	Fire retardant ABS
Environmental Rating:	IP65
Operating / Storage Temperature:	-20° to +55°C / -30° to +65°C -4° to +131°F / -22° to +149°F
Mounting:	Integrated mounting holes / no accessory req.
Connector type / position:	SMA female side fly lead (300mm / 1ft)


Electrical Specifications

Frequency Range:	865-868 MHz / 902-928 MHz
Polarization:	Circular
Far-field Gain:	9 dBiC typical
Far-field 3 dB beamwidth:	25° in vertical, 81° in horizontal
VSWR	1.4 typical
Front to back ratio:	25 dB
Axial Ratio:	< 2 dB at boresight
Nominal impedance:	50 Ω
Anti-static protection:	DC grounded
Antenna detection	10 K Ω resistance
Maximum Input Power:	3 W

E-field elevation & Azimuth Patterns

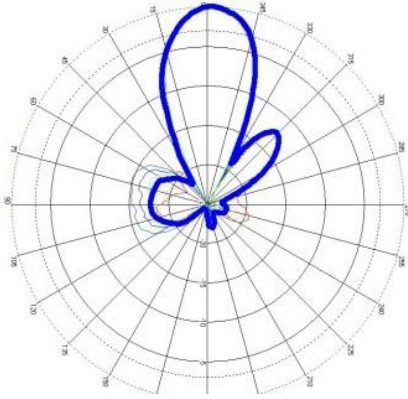

Vertical

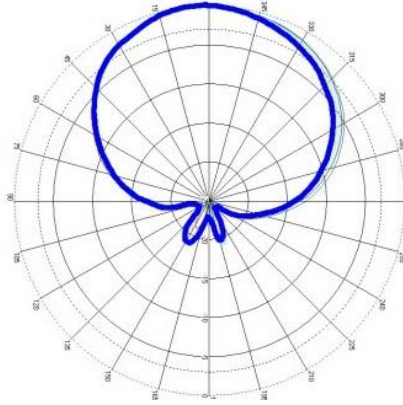


Horizontal

Ordering Information (please quote both product code & part no.)

Product Code	Band	Part No.
A6034	ETSI 865-868 MHz	70803
A6034	FCC 902-928 MHz	70809

Applications

- High performance RFID applications where long / highly accurate read zones are required
- Space constrained / Customer facing environments
- All-weather rugged design suitable for industrial applications



The technical data contained in this publication is not a guarantee for which Times-7 Research Ltd assumes legal accountability. It is indicative of typical performance, and if required should be relied on for specific applications only after due verification.

All technical data, specifications and other information contained herein are deemed to be the proprietary intellectual property of Times-7 Research Ltd. No reproduction, copy or use thereof may be made without the express written consent of Times-7 Research Ltd.

OUR GLOBAL NETWORK

Constantly increasing market reach and influence in the global RFID industry, Times-7's international support spans The Americas, Europe, and Asia Pacific regions through our distributor, authorized reseller and integrated solutions provider network.

Authorized Reseller:
RFID4u
 Store
www.rfid4ustore.com
 1-408-739-3500
sales@rfid4ustore.com

Times-7 Research Ltd
 29 Railway Avenue
 Lower Hutt 5010
 New Zealand

NEW ZEALAND
 P: +64 4 974 6566

USA/CANADA
 P: +1 408 769 5025

E: info@times-7.com

www.times-7.com